




# Zeki TBQG884B Camera Replacement

Replace the camera on the Zeki TBQG884B tablet.

Written By: Natalie Holm

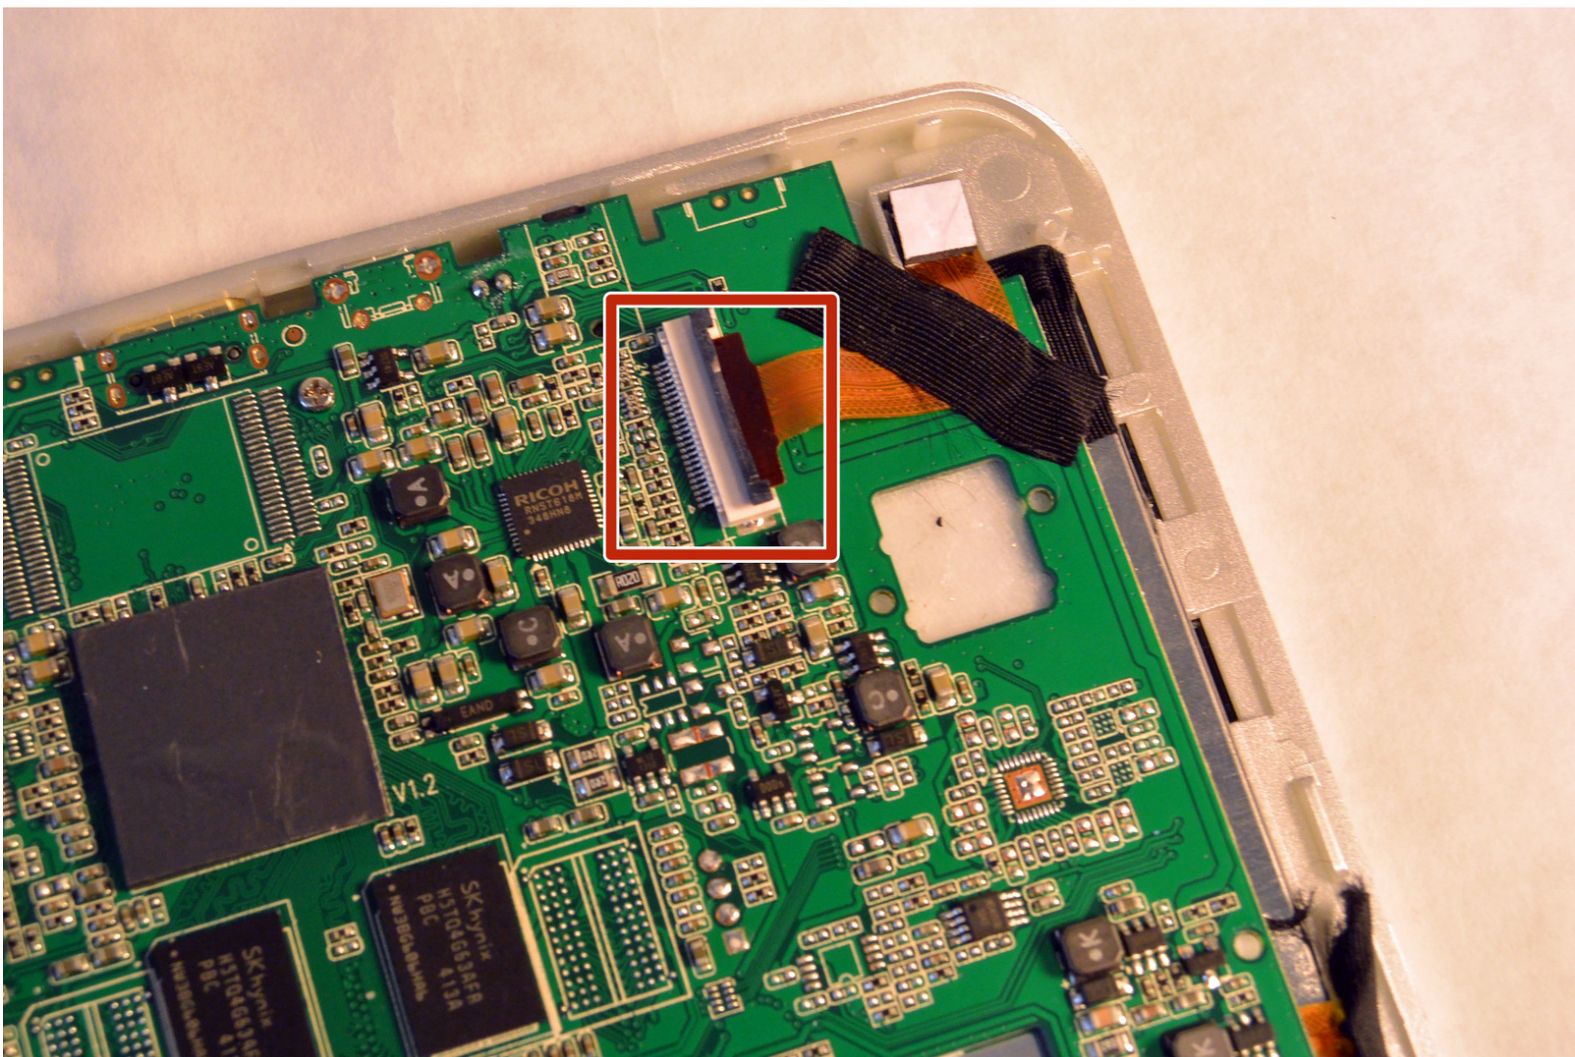

## INTRODUCTION


Use this guide to replace a damaged camera on the Zeki TBQG884B tablet.

## Step 1 — Rear Case



- Remove the two screws from the end of the device where the ports are located.

## Step 2

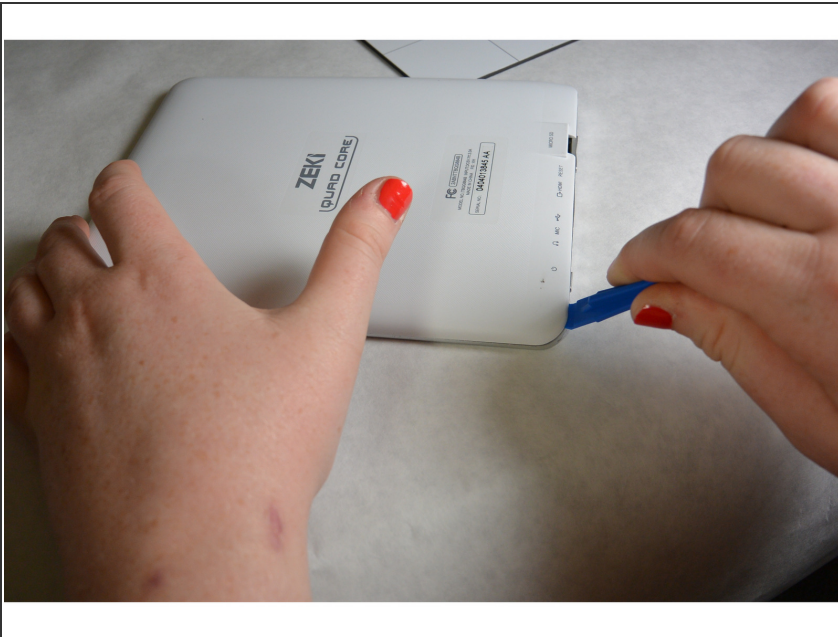


- Rest the tablet on its glass face.
- Insert the tip of a plastic opening tool into the small gap between grey and white plastic and pry open (You should hear the clips opening up).
- Gently work your way around the parameter of the tablets edge.





## Step 3



- Remove back plate from the face plate.
- Remove the tape from speaker and detach speaker from back plate.

 The speaker is connected to the motherboard by two soldered wires. Don't break them when you remove the speaker.

## Step 4 — Camera

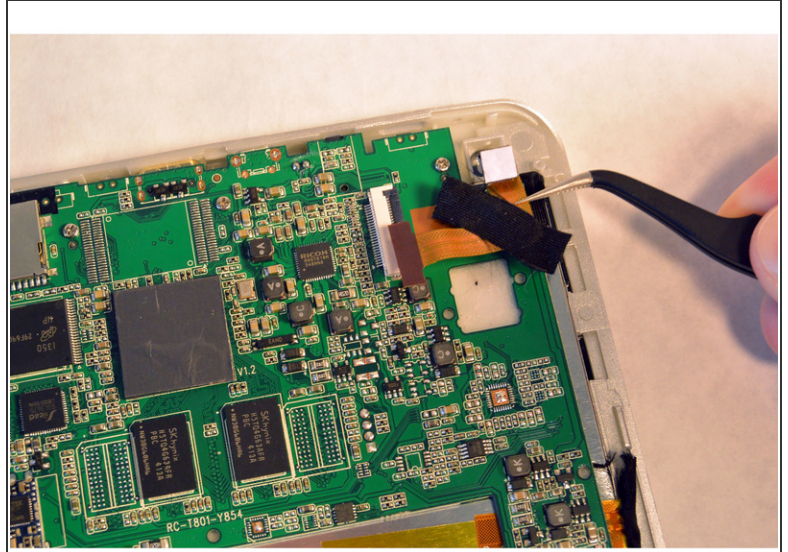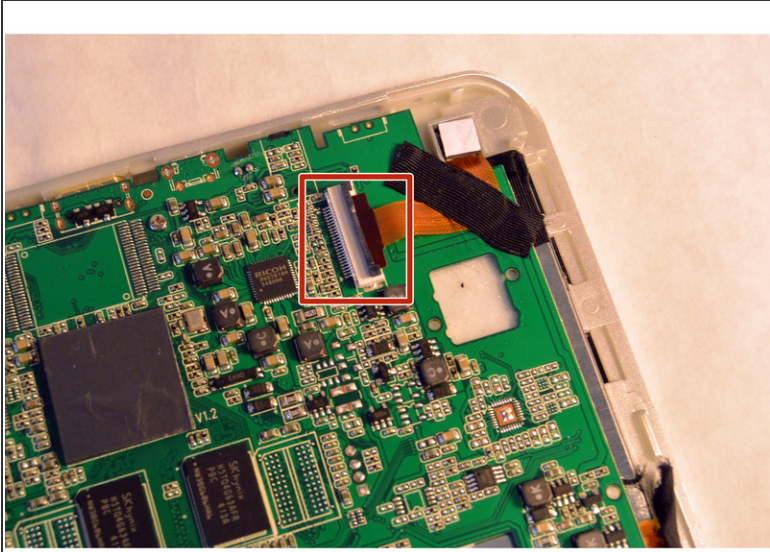

- Open the ZIF connector, the black locker part over the wire ribbon in the motherboard and remove the wire ribbon which connects the motherboard and the camera.
- ⓘ The camera is located on the top left above the motherboard.
- ⚠ The camera is usually covered with tape or material. Remove them and peel the camera off with tweezers for safety.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-25 05:43:25 AM.